


K-No.: 25150

125 A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed ..., with a galvanic isolation
between the primary circuit (high power)
and the secondary circuit (electronic circuit)


Date: 17.04.2013

Customer: Standard type

Customers Part no.:

Page 1 of 2

Description

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

Applications

- Mainly used for stationary operation in industrial applications:
- AC variabel speed drives and servo motor drives
 - Static converters for DC motor drives
 - Battery supplied applications
 - Switched Mode Power Supplies (SMPS)
 - Power Supplies for welding applications
 - Uninterruptable Power Supllies (UPS)

Electrical data – Ratings

I_{PN}	Primary nominal r.m.s. current	125	A
R_M	Measuring resistance $V_C = \pm 12V$	5 ... 250	Ω
	$V_C = \pm 15V$	18...400	Ω
I_{SN}	Secondary nominal r.m.s. current	125	mA
K_N	Turns ratio	1: 1000	

Accuracy – Dynamic performance data

		min.	typ.	max.	Unit
$I_{P,max}$	Max. measuring range @ $V_C = \pm 12V$, $R_M = 14 \Omega$ ($t_{max} = 10sec$) @ $V_C = \pm 15V$, $R_M = 25 \Omega$ ($t_{max} = 10sec$)	± 201			A
X	Accuracy @ I_{PN} , $T_A = 25^\circ C$	± 214			A
ϵ_L	Linearity	0.1	0.5	%	
I_0	Offset current @ $I_P=0$, $T_A = 25^\circ C$	0.03	0.1	mA	
t_r	Response time	1			μs
$\Delta t (I_{P,max})$	Delay time at $dI/dt = 100 A/\mu s$	0.5			μs
f	Frequency bandwidth	DC...100			kHz

General data

		min.	typ.	max.	Unit
T_A	Ambient operating temperature	-40	+85	$^\circ C$	
T_S	Ambient storage temperature	-40	+90	$^\circ C$	
m	Mass	30		g	
V_C	Supply voltage	± 11.4	$\pm 12/\pm 15$	± 15.75	V
I_C	Current consumption	18		mA	

Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1- 4 to inner hole)
Reinforced insulation, Insulation material group 1, Pollution degree 2

S_{clear}	Clearance (component without solder pad)	12	mm	
S_{creep}	Creepage (component without solder pad)	12	mm	
V_{sys}	System voltage overvoltage category 3	RMS	600	V
V_{work}	Working voltage (table 7 acc. to EN61800-5-1)			
	Over voltage category 2	RMS	1000	V
U_{PD}	Rated discharge voltage	peak value	1225	V

Max. potential difference acc. to UL 508 RMS 600 V_{AC}

Maximal continuous and peak currents at defined temperatures

Supply voltage $\pm 12V$:

T_A	85 °C	85 °C	70 °C	55 °C
I_P	125 A	100 A	130 A	150 A
$I_{P,max}$	205 A	224 A	255 A	262 A
R_M	14 Ω	10 Ω	5 Ω	5 Ω

T_A	85 °C	85 °C	70 °C	55 °C
I_P	125 A	80 A	100 A	125 A
$I_{P,max}$	176 A	218 A	223 A	255 A
R_M	39 Ω	25 Ω	25 Ω	18 Ω

Date Name Issue Amendment

17.04.13 KRe. 81 Mechanical outline: marking with UL-sign. and max. potential difference added. CN-653

20.10.10 Le 81 Mechanical outline – Error correction – distance of fastening bores (41,4 to 40,64) lapidary change.

Hrsg.: KB-E Bearb: Le. editor designer KB-PM IA: KRe. check freig.: HS released

K-No.: 25150

125 A Current Sensor

For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic isolation
 between the primary circuit (high power)
 and the secondary circuit (electronic circuit)



Date: 17.04.2013

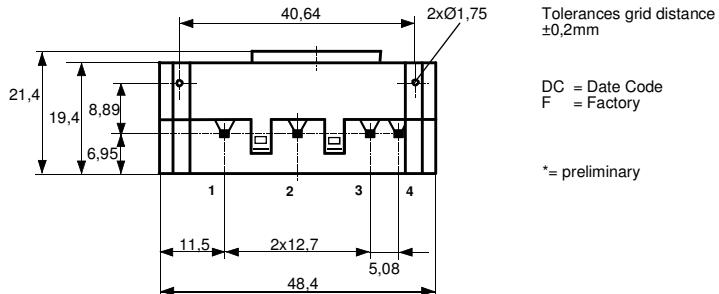
Customer: Standard type

Customers Part no.:

Page 2 of 2

Mechanical outline (mm):


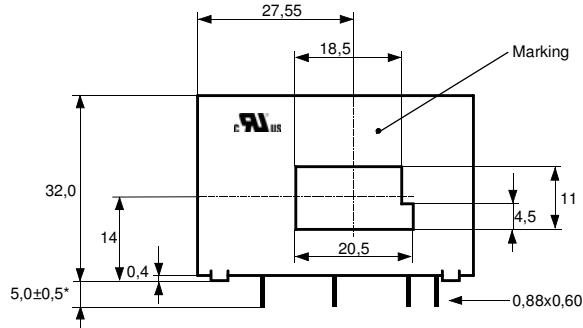
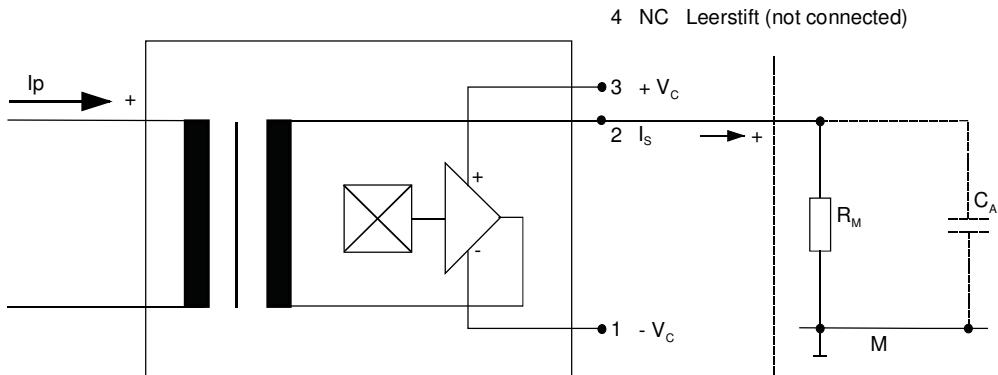
General tolerances DIN ISO 2768-c



Connections:
 1...4: $0,6 \times 0,88 \text{ mm}$

Marking:

UL-sign
 4646X200
 F DC

**Schematic diagram**Temperature of the primary conductor should not exceed 110°C


Additional indications are obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E
editorBearb: Le.
designerKB-PM IA: KRe.
checkfreig.: HS
released

K-No.: 25150

125 A Current Sensor

 For electronic current measurement:
 DC, AC, pulsed, mixed ..., with a galvanic
 isolation between primary circuit
 (high power) and secondary circuit

Date: 17.04.2013

Customer:
Customers Part No.:
Page 1 of 3
Electrical Data (investigate by a type checking)

		min.	typ.	max.	Unit
V_{Ctot}	Maximum supply voltage (without function) ± 15.75 to ± 18 V: for 1s per hour			± 18	V
R_S	Secondary coil resistance @ $T_A=85^\circ\text{C}$		41		Ω
X_{Ti}	Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$		0.1		%
I_{0ges}	Offset current (including I_0 , I_{0t} , I_{0T})		0.14		mA
I_{0t}	Long term drift Offset current I_0	0.05			mA
I_{0T}	Offset current temperature drift I_0 @ $T_A = -40 \dots +85^\circ\text{C}$	0.05			mA
I_{0H}	Hysteresis current @ $I_P=0$ (caused by primary current $10 \times I_{PN}$)	0.05	0.1		mA
$\Delta I_0/\Delta V_C$	Supply voltage rejection ratio		0.01		mA/V
i_{loss}	Offset ripple (with 1 MHz- filter first order)	0.1			mA
i_{loss}	Offset ripple (with 100 kHz- filter first order)	0.015	0.04		mA
i_{loss}	Offset ripple (with 20 kHz- filter first order)	0.007	0.01		mA
C_k	Maximum possible coupling capacity (primary – secondary)	7			pF

Inspection (Measurement after temperature balance of the samples at room temperature)

$K_N(N_1/N_2)$	(V)	M3011/6	Transformation ratio ($I_P=100\text{A}$, 40-80 Hz)	1: 995...1005
I_P	(V)	M3011/4	Primary current	100 A
I_0	(V)	M3226	Offset current	< 0.1 mA
V_d	(V)	M3014:	Test voltage, rms, 1 s pin 1 – 3 vs. hole	1.8 kV
V_e	(AQL 1/S4)		Partial discharge voltage acc.M3024 (RMS) with V_{vor} (RMS)	1300 V 1625 V

Type Testing (Pin 1 - 3 to hole)


V_W	HV transient test according to M3064 (1,2 μs / 50 μs -wave form)	8	kV
V_d	Testing voltage to M3014	(5 s)	3.6 kV
V_e	Partial discharge voltage acc.M3024 (RMS) with V_{vor} (RMS)	1300 V 1625 V	V

Datum	Name	Index	Änderung
17.04.13	KRe.	81	Applicable documents: further standards added. CN-653
20.10.10	Le	81	Date updated.
Hrsg.: KB-E editor	Bearb: Le designer	KB-PM: KRe check	freig.: HS released

K-No.: 25150

125 A Current Sensor

For electronic current measurement:
DC, AC, pulsed, mixed ..., with a galvanic
isolation between primary circuit
(high power) and secondary circuit

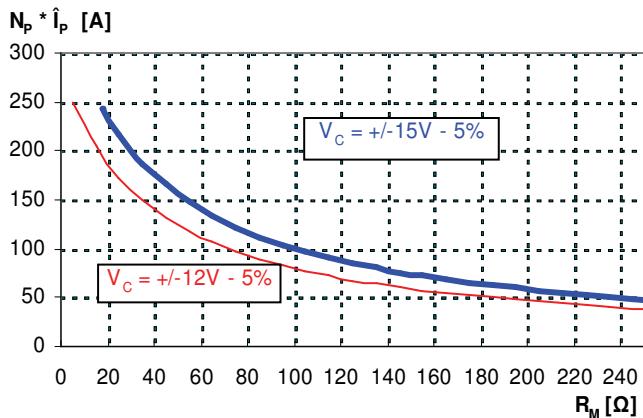


Date: 17.04.2013

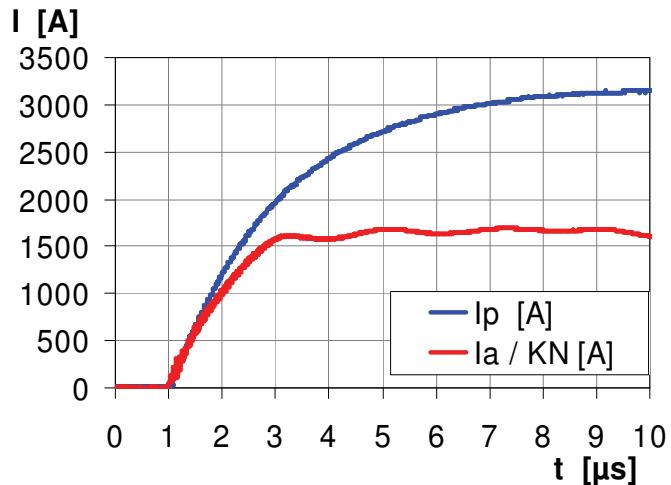
Customer:

Customers Part No.:

Page 2 of 3

Limit curve of measurable current $\hat{I}_P(R_M)$ @ ambient temperature $\leq 85^\circ\text{C}$ **Maximum measuring range (μs -range)**

Output current behaviour of a 3kA current pulse
@ $V_C = \pm 15\text{V}$ und $R_M = 10\Omega$



Fast increasing currents (higher than the specified $I_{p,\max}$), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly and be limited by diodes only.

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2\pi \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.


It is calculated from:

$$t'_r \leq t_r + 2,5 R_M C_a$$

Applicable documents

Current direction: A positive output current appears at point Is, by primary current in direction of the arrow.
Further standards UL 508 ; file E317483, category NMTR2 / NMTR8

Hrsg.: KB-E
editorBearb: Le
designerKB-PM: KRe
checkfreig.: HS
released

K-No.: 25150	125 A Current Sensor For electronic current measurement: DC, AC, pulsed, mixed ..., with a galvanic isolation between primary circuit (high power) and secondary circuit		Date: 17.04.2013
--------------	---	--	------------------

Customer:	Customers Part No.:	Page 3 of 3
-----------	---------------------	-------------

Explanation of several of the terms used in the tablets (in alphabetical order)

I_{OH} : Zero variation after overloading with a DC of tenfold the rated value ($R_M = R_{MN}$)

I_{ot} : Long term drift of I_o after 100 temperature cycles in the range -40 bis 85 °C.

t_r : Response time, measured as delay time at $I_P = 0,8 \cdot I_{Pmax}$ between a rectangular current and the output current.

$\Delta t (I_{Pmax})$: Delay time between I_{Pmax} and the output current i_a with a primary current rise of $di_1/dt = 100 \text{ A}/\mu\text{s}$.

U_{PD} Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage V_e
 $U_{PD} = \sqrt{2} * V_e / 1,5$

V_{vor} Defined voltage is the RMS value of a sinusoidal voltage with peak value of $1,875 * U_{PD}$ required for partial discharge test in IEC 61800-5-1

$$V_{vor} = 1,875 * U_{PD} / \sqrt{2}$$

V_{sys} System voltage RMS value of rated voltage according to IEC 61800-5-1

V_{work} Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

$X_{ges}(I_{PN})$: The sum of all possible errors over the temperature range by measuring a current I_{PN} :

$$X_{ges} = 100 \cdot \left| \frac{I_S(I_{PN})}{K_N \cdot I_{PN}} - 1 \right|$$

X : Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{I_{SB}}{I_{SN}} - 1 \right|$$

where I_{SB} is the output DC value of an input DC current of the same magnitude as the (positive) rated current ($I_o = 0$)

X_{Ti} : Temperature drift of the rated value orientated output term. I_{SN} (cf. Notes on F_i) in a specified temperature range, obtained by:

$$X_{Ti} = 100 \cdot \left| \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right|$$

ε_L : Linearity fault defined by $\varepsilon_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right|$

Where I_P is any input DC and I_{Sx} the corresponding output term. I_{SN} : see notes of F_i ($I_o = 0$).

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E	Bearb: Le		KB-PM: KRe		freig.: HS
-------------	-----------	--	------------	--	------------