


K-No.: 24831

**100 A Current Sensor**

For the electronic measurement of currents:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 Isolation between the primary circuit  
 (high power) and the secondary circuit  
 (electronic circuit)



Date: 18.04.2013

Customer: Standard type

Customers Part no.:

Page 1 of 2

**Description**

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Low response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

- Mainly used for stationary operation in industrial applications:
- AC variable speed drives and servo motor drives
  - Static converters for DC motor drives
  - Battery supplied applications
  - Switched Mode Power Supplies (SMPS)
  - Power Supplies for welding applications
  - Uninterruptable Power Supplies (UPS)

**Electrical data – Ratings<sup>1)</sup>**

I <sub>PN</sub>	Primary nominal r.m.s. current	100	A
R <sub>M</sub>	Measuring resistance V <sub>C</sub> =± 12V	10 ... 200	Ω
	V <sub>C</sub> =± 15V	10 ... 400	Ω
I <sub>SN</sub>	Secondary nominal r.m.s. current	66.7	mA
K <sub>N</sub>	Turns ratio	1...3 : 1500	

**Accuracy – Dynamic performance data<sup>1)</sup>**

		min.	typ.	max.	Unit
I <sub>P,max</sub>	Max. measuring range @ V <sub>C</sub> = ±12V, R <sub>M</sub> = 10 Ω (t <sub>max</sub> = 10sec) @ V <sub>C</sub> = ±15V, R <sub>M</sub> = 10 Ω (t <sub>max</sub> = 10sec)	±165			A
		±208			A
X	Accuracy @ I <sub>PN</sub> , T <sub>A</sub> = 25 °C	0.1	0.5		%
ε <sub>L</sub>	Linearity		0.1		%
I <sub>0</sub>	Offset current @ I <sub>P</sub> =0, T <sub>A</sub> = 25 °C	0.02	0.1		mA
t <sub>r</sub>	Response time	500			ns
Δt (I <sub>P,max</sub> )	Delay time at di/dt = 100 A/μs	200			ns
f	Frequency bandwidth	DC...200			kHz

**General data<sup>1)</sup>**

		min.	typ.	max.	Unit
T <sub>A</sub>	Ambient operating temperature	-40	+70		°C
T <sub>S</sub>	Ambient storage temperature	-40	+90		°C
m	Mass		13,5		g
V <sub>C</sub>	Supply voltage	±11.4	±12 or ±15	±15.75	V
I <sub>C</sub>	Current consumption		18.5		mA
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 9) Reinforced insulation, Insulation material group 1, Pollution degree 2				
S <sub>clear</sub>	clearance (component without solder pad)	10.2			mm
S <sub>creep</sub>	creepage (component without solder pad)	10.2			mm
V <sub>sys</sub>	System voltage overvoltage category 3	RMS	600		V
V <sub>work</sub>	Working voltage (table 7 acc. to EN61800-5-1)	RMS	1020		V
U <sub>PD</sub>	Rated discharge voltage	peak value	1400		V


Max. potential difference acc. to UL 508	RMS	600	V <sub>AC</sub>
------------------------------------------	-----	-----	-----------------

Date	Name	Issue	Amendment
18.04.13	KRe	81	Mechanical outline: marking with UL-sign. and max. potential difference added. CN-662
28.01.08	Le	81	Date changed. Insignificant
Hrsg.: KB-E editor	Bearb: Le. designer	KB-PM IA: KRe. check	freig.: HS released

**K-No.:** 24831

**100 A Current Sensor**

For the electronic measurement of currents:  
DC, AC, pulsed, mixed ..., with a galvanic  
Isolation between the primary circuit  
(high power) and the secondary circuit  
(electronic circuit)




**Date:** 18.04.2013

**Customer:** Standard type

**Customers Part no.:**
**Page** 2 **of** 2

**Mechanical outline (mm):**

General tolerances DIN ISO 2768-c

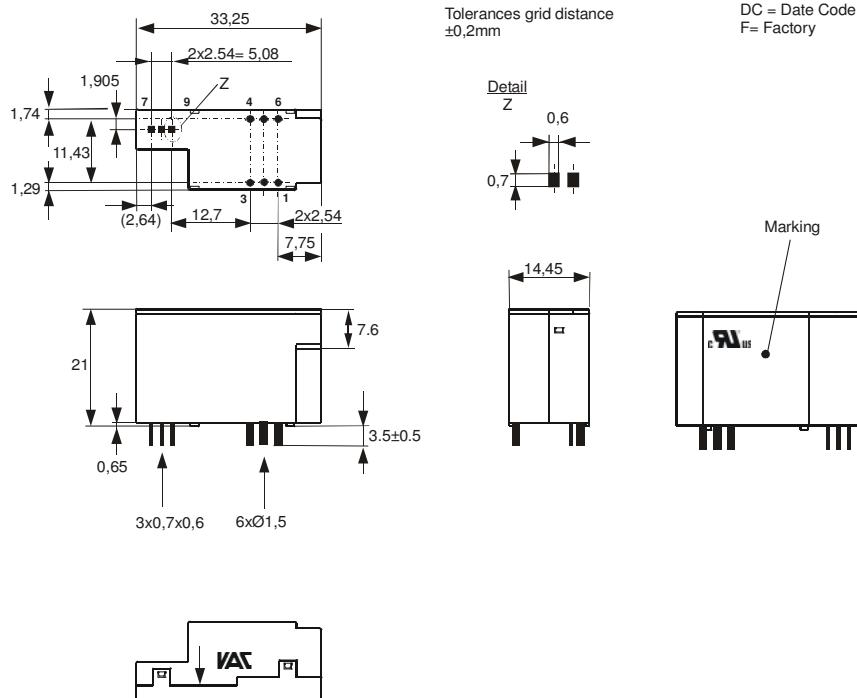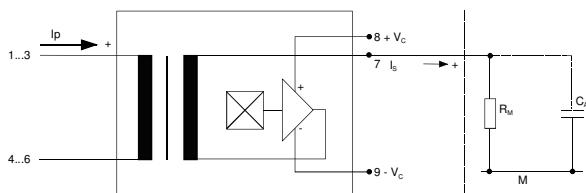
**Schematic diagram**

**Possibilities of wiring for  $V_C = \pm 15V$**  (@  $T_A = 70^\circ C$ ,  $R_M = 15 \Omega$ )

primary windings <b>N<sub>P</sub></b>	primary current RMS <b>I<sub>P</sub> [A]</b>	primary current maximal RMS <b>I<sub>P,max</sub> [A]</b>	output current RMS <b>I<sub>S</sub> (I<sub>P</sub>) [mA]</b>	turns ratio <b>K<sub>N</sub></b>	primary resistance <b>R<sub>P</sub> [mΩ]</b>	wiring
1	100	208	66.7	1:1500	0.12	
2	35	104	46.7	2:1500	0.54	
3	25	69	50	3:1500	1.1	

Temperature of the primary conductor should not exceed 100°C.

Additional information is obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E  
editor

Bearb: Le.  
designer


KB-PM IA: KRe.  
check

freig.: HS  
released

K-No.: 24831

**100 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 18.04.2013

Customer:

Customers Part No.:

Page 1 of 3

ME

**Electrical Data (investigate by a type checking)<sup>1)</sup>**

A=km  
1=St  
2=kg  
3=g  
4=l  
5=m  
6=m<sup>2</sup>  
7=m<sup>3</sup>  
8=mm  
9:Paar

		min.	typ.	max.	Unit
V <sub>Ctot</sub>	Maximum supply voltage (without function) ±15.75 ... ±18 V: for 1s per hour			±18	V
R <sub>S</sub>	Secondary coil resistance @ T <sub>A</sub> =70°C			88	Ω
R <sub>p</sub>	Primary coil resistance per turn @ T <sub>A</sub> =25°C			0.36	mΩ
X <sub>Ti</sub>	Temperature drift of X @ T <sub>A</sub> = -40 ... +70 °C			0.1	%
I <sub>0ges</sub>	Offset current (including I <sub>0</sub> , I <sub>0t</sub> , I <sub>0T</sub> )			0.12	mA
I <sub>0t</sub>	Long term drift Offset current I <sub>0</sub>		0.04		mA
I <sub>0T</sub>	Offset current temperature drift I <sub>0</sub> @ T <sub>A</sub> = -40 ... +70 °C		0.04		mA
I <sub>0H</sub>	Hysteresis current @ I <sub>P</sub> =0 (caused by primary current 3 x I <sub>PN</sub> )	0.03		0.07	mA
ΔI <sub>0</sub> /ΔV <sub>C</sub>	Supply voltage rejection ratio		0.01		mA/V
i <sub>oss</sub>	Offset ripple* (with 1 MHz- filter first order)		0.15		mA
i <sub>oss</sub>	Offset ripple* (with 100 kHz- filter first order)	0.035	0.05		mA
i <sub>oss</sub>	Offset ripple* (with 20 kHz- filter first order)	0.009	0.012		mA
C <sub>k</sub>	Maximum possible coupling capacity (primary – secondary)	5			pF

Mechanical Stress according to M3209/3

Settings: 10 – 2000 Hz, 1 min/Oktave, 2 hours

An exceptionally high rate of on/off – switching of the supply voltage  
accelerates the aging process of the sensor.

**Inspection<sup>1)</sup> (Measurement after temperature balance of the samples at room temperature)**

K <sub>N</sub> (N <sub>1</sub> /N <sub>2</sub> )	(V)	M3011/6	Transformation ratio (I <sub>P</sub> =3*10A, 40-80 Hz)	1...3 : 1500 ± 0.5 %
I <sub>0</sub>	(V)	M3226	Offset current	< 0.07 mA
V <sub>P,eff</sub>	(V)	M3014	Test voltage, rms, 1s Pin 1 - 6 to Pin 7 - 9	2.5 kV
V <sub>e</sub>	(AQL 1/S4)		Partial discharge voltage acc. M3024 (RMS) with V <sub>vor</sub> (RMS)	1500 V 1875 V

**Type Testing (Pin 1 - 6 to Pin 7 – 9)**

Designed according standard EN 61800 with insulation material group 1

V <sub>W</sub>	HV transient test according (to M3064) (1,2 µs / 50 µs-wave form)	8	kV
V <sub>d</sub>	Testing voltage acc. M3014 (RMS)	(5 s)	5 kV
V <sub>e</sub>	Partial discharge voltage acc. M3024 (RMS) with V <sub>vor</sub> (RMS)		1500 V 1875 V

Datum	Name	Index	Änderung
18.04.13	KRe.	81	Applicable document: further standards added. CN-662
28.01.08	Le	81	Page 3: write error in X <sub>ges</sub> (I <sub>PN</sub> ). changed. Insignificant
Hrsg.: KB-E editor	Bearb: Le. designer		KB-PM IA: KRe. check
			freig.: HS released


Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts  
nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu  
Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any  
purposes without express written authorization by use illegally forbidden.  
Any offenders are liable to pay all relevant damages.

K-No.: 24831

**100 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 18.04.2013


ME

A=km  
1=St  
2=kg  
3=g  
4=l  
5=m  
6=m<sup>2</sup>  
7=m<sup>3</sup>  
8=mm  
9:Paar


Customer:

Customers Part No.:

Page 2 of 3

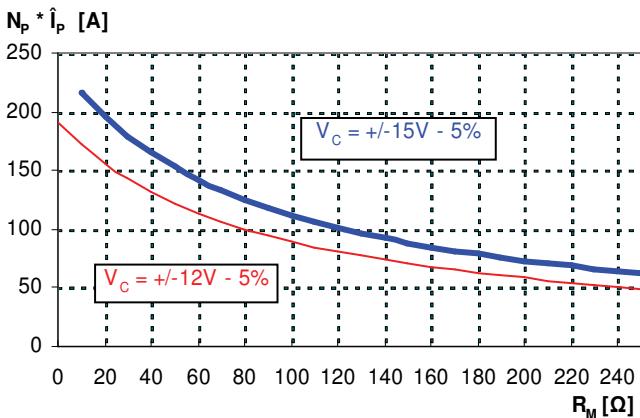**Limit curve of measurable current  $\hat{I}_P(R_M)$ <sup>1)</sup>**@ ambient temperature  $T_A \leq 85^\circ\text{C}$ **Maximum measuring range (μs-range)<sup>1)</sup>**

Output current behaviour of a 3kA current pulse  
@  $V_C = \pm 15V$  und  $R_M = 25\Omega$

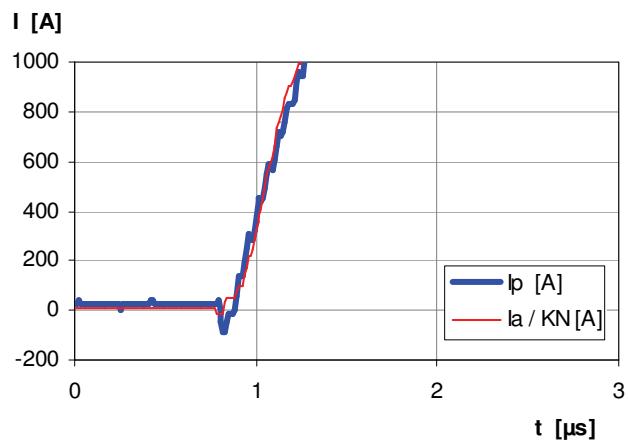

Fast increasing currents (higher than the specified  $I_{p,\max}$ ), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly.

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2\pi \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5 R_M C_a$$

**Applicable documents**

Current direction: A positive output current appears at point  $I_s$ , by primary current in direction of the arrow.

Constructed and manufactured and tested in accordance with EN 61800.

Further standards UL 508 ; file E317483, category NMTR2 / NMTR8

Hrsg.: KB-E  
editor

Bearb: Le.  
designer


KB-PM IA: KRe.  
check

freig.: HS  
released

K-No.: 24831

**100 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit



Date: 18.04.2013

Customer:

Customers Part No.:

Page 3 of 3

ME

A=km  
1=St  
2=kg  
3=g  
4=l  
5=m  
6=m<sup>2</sup>  
7=m<sup>3</sup>  
8=mm  
9:Paar

I<sub>0H</sub>: Zero variation of I<sub>o</sub> after overloading with a DC of tenfold the rated value (R<sub>M</sub> = R<sub>MN</sub>)I<sub>0t</sub>: Long term drift of I<sub>o</sub> after 100 temperature cycles in the range -40 bis 85 °C.t<sub>r</sub>: Response time (describe the dynamic performance for the specified measurement range), measured as delay time at I<sub>P</sub> = 0,9 · I<sub>Pmax</sub> between a rectangular current and the output current.Δt (I<sub>Pmax</sub>): Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between I<sub>Pmax</sub> and the output current i<sub>a</sub> with a primary current rise of di<sub>1</sub>/dt = 100 A/μs.X<sub>ges</sub>(I<sub>PN</sub>): The sum of all possible errors over the temperature range by measuring a current I<sub>PN</sub>:

$$X_{\text{ges}} = 100 \cdot \left| \frac{I_S(I_{\text{PN}})}{K_N \cdot I_{\text{PN}}} - 1 \right| \%$$

X: Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{I_{\text{SB}}}{I_{\text{SN}}} - 1 \right| \%$$

where I<sub>SB</sub> is the output DC value of an input DC current of the same magnitude as the (positive) rated current (I<sub>o</sub> = 0)X<sub>Ti</sub>: Temperature drift of the rated value orientated output term. I<sub>SN</sub> (cf. Notes on F<sub>i</sub>) in a specified temperature range, obtained by:

$$X_{\text{Ti}} = 100 \cdot \left| \frac{I_{\text{SB}}(T_{A2}) - I_{\text{SB}}(T_{A1})}{I_{\text{SN}}} \right| \%$$

ε<sub>L</sub>: Linearity fault defined by  $\varepsilon_L = 100 \cdot \left| \frac{I_P}{I_{\text{PN}}} - \frac{I_{\text{Sx}}}{I_{\text{SN}}} \right| \%$ Where I<sub>P</sub> is any input DC and I<sub>Sx</sub> the corresponding output term. I<sub>SN</sub>: see notes of F<sub>i</sub> (I<sub>o</sub> = 0).

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E  
editorBearb: Le.  
designerKB-PM IA: KRe.  
checkfreig.: HS  
released

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.  
Any offenders are liable to pay all relevant damages.